

## FTI-10 Single-Channel Signal Conditioner



**The FTI-10 is a single-channel, battery-powered fiber optic signal conditioner especially designed to work with all of FISO's fiber optic sensors. It is a general-purpose instrument ideally suited to perform single-point measurements in a myriad of industrial and R&D applications.**

The FTI-10 conditioner is designed to perform accurate single-channel measurements. Thanks to its unique, patented technology, the FTI-10 conditioner is capable of measuring the absolute cavity length of FISO's Fabry-Perot fiber optic sensors with astonishing accuracy, providing highly accurate and reliable measurements. The FTI-10 has a 0.01% full-scale resolution and a 0.025% full-scale precision.

The FTI-10 optical input channel is easily accessible through the unit's front panel. It comes standard with an RS-232 communication port and a  $\pm 10$  V adjustable analog output. Moreover, the unit's internal Flash ROM can be accessed to allow firmware upgrades and updates.

Data is stored in the internal memory buffer for later retrieval or sent directly to any analog input signal reading device through the  $\pm 10$  V adjustable analog output available on the back panel of the FTI-10 unit.

FISO's fiber optic temperature, pressure, strain, refractive index, and displacement sensors offer complete immunity to RF and microwave radiation with high temperature operating capability, intrinsic safety, and non-invasive use. A seven-digit gauge factor assigned to each sensor allows the FTI-10 conditioner to recognize automatically the sensor type and calibration, reducing test setup time.

The FTI-10 conditioner has a non-volatile memory buffer that can store up to 50 000 data points. Data logging sequences, duration, and other acquisition and data-management parameters are easily programmable using the front-panel interface, through RS-232 remote control commands or, even more easily, thanks to its accompanying software, FISOCOMMANDER.

The FTI-10 comes in a rugged 1/8 DIN casing designed to withstand heavy use and operation in industrial environments and has up to 8 hours of battery autonomy.

### Key Features

- Compatible with most of FISO's fiber optic sensors
- Voltage output and RS-232 communication port
- Backlight LCD screen
- Small footprint
- Rugged and easy to use
- Battery powered
- 1/8 DIN enclosure

### Applications

- Microwave food processing
- Thermotherapy
- NMR applications
- Microwave and RF
- High temperature pressure measurements
- Multi-purpose laboratory applications
- Advanced composite materials
- Hazardous environments
- Aerospace applications




## Specifications

|                        |   |
|------------------------|---|
| Number of channels     | 1   |
| Sampling rate          | 10 Hz   |
| Averaging              | 1 to 500 samples  |
| Precision              | 0.025% of full scale  |
| Resolution             | 0.01% of full scale   |
| Dynamic range          | 15 000 : 1  |
| Display                | 1 line 16 characters liquid crystal display with back-light     |
| Data logging           | 50 000 data points  |
| Analog output          | ±10 V with screw connectors <sup>1</sup>                        |
| Communication          | RS-232  |
| Upgradeability         | Flash ROM firmware  |
| Lamp life <sup>2</sup> | 40 000 hours of continuous use                                  |
| Weight                 | 0.9 kg (2 lb)   |
| Dimensions (W × D × H) | 90 × 165 × 48 mm (1/8 DIN) (3.5 × 6.5 × 1.9 in)                 |
| Autonomy               | 8 hours with fully-charged battery (0.5 Watt power consumption) |
| Power requirements     | 12 Volts DC (wallmount adapter included)                        |
| Operating temperature  | -20°C to 40°C (-4°F to 104°F)                                   |

1. 4-20 mA optional.
2. Lamp is replaceable.

## FTI-10 Dimensions

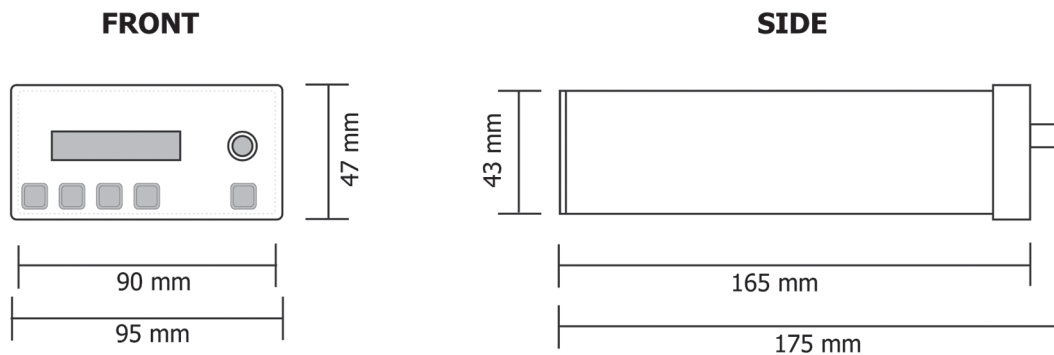

Svensk generalagent och distributör:

Sensotest AB

Girovägen 13 - 17562 Järfälla

Tel: 08-56473380 - Fax: 08-56473389 - [www.sensotest.se](http://www.sensotest.se) - [info@sensotest.se](mailto:info@sensotest.se)

FISO Technologies Inc.

500 St-Jean-Baptiste Ave., suite 195  
Québec, QC  
Canada G2E 5R9

Phone (418) 688-8065  
Fax (418) 688-8067

Email [info@fiso.com](mailto:info@fiso.com)  
Web [www.fiso.com](http://www.fiso.com)

FISO Technologies Inc. reserves the right to make any changes  
in the specifications of their products without prior notice.  
© 2006 FISO Technologies Inc.  
Imprimé au Canada / Printed in Canada  
DOC: MC-00033R4