


More Precision.



optris® BR

Calibration source BR 400



Thermal image of the radiator

FEATURES

- Radiator temperature up to 400°C
- Excellent homogeneity, precision & long-term stability
- Compact and rugged design
- Perfect for calibrating and testing infrared sensors

General specifications

Ambient temperature	0 - 50°C (during operation)
Weight	4.5 kg
Dimensions (H x B x T)	325 mm x 230 mm x 230 mm

Electrical specifications

Temperature sensor	Pt100
Controller	PID
Power supply	220 V AC, 50 Hz
Power consumption	500 W

Measurement specifications


Temperature range	$T_{amb} + 5^{\circ}\text{C} - 400^{\circ}\text{C}$
Accuracy	1 % of reading, ± 1 digit
Temperature resolution	0.1°C
Aperture	128 mm
Emissivity	0.95
Warm-up time	45 min

Operating elements front: PID-controller



Operating elements/Connections backside:

- 1 - Power switch
- 2 - Fuse
- 3 - Power supply

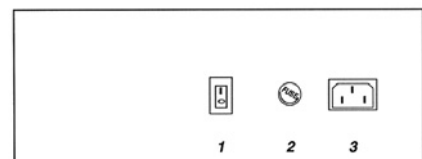

Optris GmbH

Strasse 49, Nr. 14
13127 Berlin/Germany

Tel.: +49 (0) 30 500 197-0
Fax: +49 (0) 30 500 197-10

info@optris.de
www.optris.de

A member of the micro-epsilon group.

Specifications are subject to change without notice.
BR-DS-E2005-06-B

